


Tapered Rod				
Shank H22 108mm (7/8" 4 1/4")				
Sr. No	Taper Angle	Effective Length(L)		Approx Weight(kg)
		mm	ft in	
1	6"	400	1' 1 3/4"	1.6
		800	2' 7 1/2"	2.5
		1200	3' 11"	4.1
		1600	5' 3"	5.3
		2400	7' 10"	7.7
		3200	10' 6"	10.1
		4000	13' 1 1/2"	12.6
		4800	15' 9"	15.1
		5600	18' 4 1/2"	17.5
2	7"	610	2' -	2.3
		1220	4' -	4.2
		1830	6' -	6.2
		2440	8' -	8
		3050	10' -	9.8
		3660	12' -	11.4
		5485	18' -	17.1
		6400	21' -	19.8
7315	24' -	22.6		
3	11"	1220	4' -	4.1
		1830	6' -	5.9
		2440	8' -	7.8
		3050	10' -	9.6
4	12"	610	2' -	2.3
		1220	4' -	4.2
		1830	6' -	6
		2000	6' 7"	6.5
		2440	8' -	7.9
		3050	10' -	9.8
		3660	12' -	11.4
		5485	18' -	17.1
		6400	21' -	19.8
		7315	24' -	22.6

■ Shank H22 × 108mm (7/8" × 4 1/4")

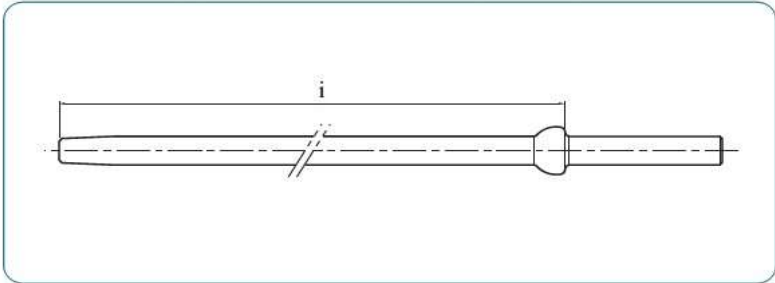

*Special size is available upon your request